




AWWA C207-07 B-RINGS and BLINDS

86 P.S.I.
Dimensions in Inches

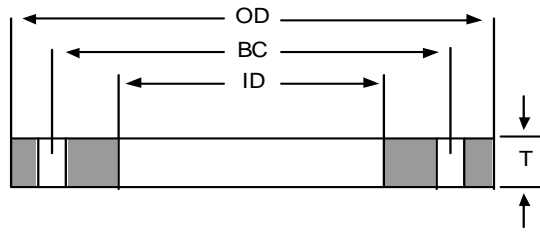

Nominal size	Outside Diameter (OD)	Slip-on Bore (ID)	No. of Bolt Holes	Diameter Of Holes	Bolt Circle (BC)	Thickness (T)		Weight Each (lbs)	
						Slip-on	Blind	Slip-on	Blind
4	9.00	4.57	8	0.750	7.50	0.625	0.625	7.7	10.6
5	10.00	5.66	8	0.875	8.50	0.625	0.625	8.6	13.1
6	11.00	6.72	8	0.875	9.50	0.688	0.688	10.7	17.6
8	13.50	8.72	8	0.875	11.75	0.688	0.688	15.3	27.0
10	16.00	10.88	12	1.000	14.25	0.688	0.688	19.2	37.4
12	19.00	12.88	12	1.000	17.00	0.688	0.719	28.0	55.8
14	21.00	14.19	12	1.125	18.75	0.688	0.791	34.4	75.0
16	23.50	16.19	16	1.125	21.25	0.688	0.892	41.3	105.6
18	25.00	18.19	16	1.250	22.75	0.688	0.950	41.2	126.8
20	27.50	20.19	20	1.250	25.00	0.688	1.040	48.6	167.8
22	29.50	22.19	20	1.375	27.25	0.750	1.132	56.8	209.7
24	32.00	24.19	20	1.375	29.50	0.750	1.216	66.9	266.9
26	34.25	‡	24	1.375	31.75	0.812	1.307		328.0
28	36.50	‡	28	1.375	34.00	0.875	1.398		398.0
30	38.75	‡	28	1.375	36.00	0.875	1.477		476.1
32	41.75	‡	28	1.625	38.50	0.938	1.581		587.2
34	43.75	‡	32	1.625	40.50	0.938	1.661		676.2
36	46.00	‡	32	1.625	42.75	1.000	1.751		791.6
38	48.75	‡	32	1.625	45.25	1.000	1.853		945.1
40	50.75	‡	36	1.625	47.25	1.000	1.933		1067.0
42	53.00	‡	36	1.625	49.50	1.125	2.023		1221.8
44	55.25	‡	40	1.625	51.75	1.125	2.114		1386.3
46	57.25	‡	40	1.625	53.75	1.125	2.194		1548.6
48	59.50	‡	44	1.625	56.00	1.250	2.285		1741.1
50	61.75	‡	44	1.875	58.25	1.250	2.377		1935.1
52	64.00	‡	44	1.875	60.50	1.250	2.468		2164.6
54	66.25	‡	44	1.875	62.75	1.375	2.559		2411.3
60	73.00	‡	52	1.875	69.25	1.500	2.820		3229.4
66	80.00	‡	52	1.875	76.00	1.625	3.092		4277.8
72	86.50	‡	60	1.875	82.50	1.750	3.353		5425.4
78	93.00	‡	64	2.125	89.00	2.000			
84	99.75	‡	64	2.125	95.50	2.000			
90	106.50	‡	68	2.438	102.00	2.250			
96	113.25	‡	68	2.438	108.50	2.250			
102	120.00	‡	72	2.688	114.50	2.500			
108	126.75	‡	72	2.688	120.75	2.500			
114	133.50	‡	76	2.938	126.75	2.750			
120	140.25	‡	76	2.938	132.75	2.750			
126	147.00	‡	80	3.188	139.25	3.000			
132	153.75	‡	80	3.188	145.75	3.000			
144	167.25	‡	84	3.438	158.25	3.250			

‡ The purchaser shall specify the ID of the flange for nominal pipe sizes 26 in. and larger. The diameter of the flange bore shall not exceed the pipe OD by more than .25 in.

Corporate Headquarters

CAB Incorporated
4161 Chamblee Road, Oakwood, GA USA 30566
800/241-7311 770/965-8180 Fax 770/965-8175
www.cabinc.com email: sales@cabinc.com

Texas Manufacturing Facility

CAB Incorporated
2306 Rayburn Drive, Nacogdoches, TX USA 75961
800/435-2643 936/569-9430 Fax 936/569-0795