




AWWA C207-07 D-RINGS and BLINDS

175-150 P.S.I.
Dimensions in Inches

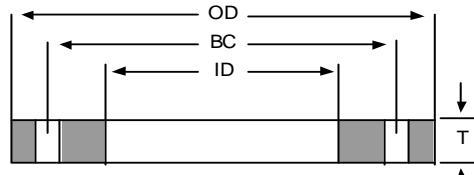

Nominal size	Outside Diameter (OD)	Slip-on Bore (ID)	No. of Bolt Holes	Diameter Of Holes	Bolt Circle (BC)	Thickness (T)		Weight Each (lbs)	
						Slip-on	Blind	Slip-on	Blind
4	9.00	4.57	8	0.750	7.50	0.625	0.625	7.7	10.6
5	10.00	5.66	8	0.875	8.50	0.625	0.650	8.6	13.6
6	11.00	6.72	8	0.875	9.50	0.688	0.693	10.7	17.7
8	13.50	8.72	8	0.875	11.75	0.688	0.812	15.3	31.8
10	16.00	10.88	12	1.000	14.25	0.688	0.953	19.2	51.7
12	19.00	12.88	12	1.000	17.00	0.812	1.117	33.1	86.7
14	21.00	14.19	12	1.125	18.75	0.938	1.133	46.9	107.4
16	23.50	16.19	16	1.125	21.25	1.000	1.265	60.1	149.8
18	25.00	18.19	16	1.250	22.75	1.062	1.331	63.6	177.7
20	27.50	20.19	20	1.250	25.00	1.125	1.448	79.5	233.6
22	29.50	22.19	20	1.375	27.25	1.188	1.568	89.9	290.5
24	32.00	24.19	20	1.375	29.50	1.250	1.661	111.6	364.5
26	34.25	‡	24	1.375	31.75	1.312	1.786		448.2
28	36.50	‡	28	1.375	34.00	1.312	1.906		542.6
30	38.75	‡	28	1.375	36.00	1.375	2.008		647.3
32	41.75	‡	28	1.625	38.50	1.500	2.150		798.6
34	43.75	‡	32	1.625	40.50	1.500	2.252		916.9
36	46.00	‡	32	1.625	42.75	1.625	2.370		1071.4
38	48.75	‡	32	1.625	45.25	1.625	2.506		1278.2
40	50.75	‡	36	1.625	47.25	1.625	2.609		1440.1
42	53.00	‡	36	1.625	49.50	1.750	2.729		1648.1
44	55.25	‡	40	1.625	51.75	1.750	2.849		1868.3
46	57.25	‡	40	1.625	53.75	1.750	2.952		2083.7
48	59.50	‡	44	1.625	56.00	1.875	3.072		2340.7
50	61.75	‡	44	1.875	58.25	2.000	3.196		2601.9
52	64.00	‡	44	1.875	60.50	2.000	3.315		2907.5
54	66.25	‡	44	1.875	62.75	2.125	3.435		3236.7
60	73.00	‡	52	1.875	69.25	2.250	3.779		4327.6
66	80.00	‡	52	1.875	76.00	2.500	4.136		5722.2
72	86.50	‡	60	1.875	82.50	2.625	4.480		7249.0
78	93.00	‡	64	2.125	89.00	2.750			
84	99.75	‡	64	2.125	95.50	2.875			
90	106.50	‡	68	2.438	102.00	3.000			
96	113.25	‡	68	2.438	108.50	3.250			
102	120.00	‡	72	2.688	114.50	3.250			
108	126.75	‡	72	2.688	120.75	3.375			
114	133.50	‡	76	2.938	126.75	3.500			
120	140.25	‡	76	2.938	132.75	3.500			
126	147.00	‡	80	3.188	139.25	3.750			
132	153.75	‡	80	3.188	145.75	3.875			
144	167.25	‡	84	3.438	158.25	4.125			

‡ The purchaser shall specify the ID of the flange for nominal pipe sizes 26 in. and larger. The diameter of the flange bore shall not exceed the pipe OD by more than .25 in.

Corporate Headquarters

CAB Incorporated
5411 Cole Road, Buford, GA USA 30518
800-241-7311 678-745-2100 Fax 678-745-2082
www.cabinc.com email: sales@cabinc.com

Texas Manufacturing Facility

CAB Incorporated
2306 Rayburn Drive, Nacogdoches, TX USA 75961
800-435-2643 936-569-9430 Fax 936-569-0795