




**AWWA C207-07 E-RINGS and BLINDS**

275 P.S.I.  
Dimensions in Inches

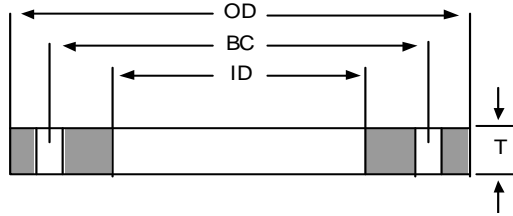

Nominal size	Outside Diameter (OD)	Slip-on Bore (ID)	No. of Bolt Holes	Diameter Of Holes	Bolt Circle (BC)	Thickness (T)		Weight Each (lbs)	
						Slip-on	Blind	Slip-on	Blind
4	9.00	4.57	8	0.750	7.50	1.125	1.125	13.9	19.2
5	10.00	5.66	8	0.875	8.50	1.188	1.188	16.3	24.8
6	11.00	6.72	8	0.875	9.50	1.313	1.313	20.4	33.6
8	13.50	8.72	8	0.875	11.75	1.500	1.500	33.4	58.8
10	16.00	10.88	12	1.000	14.25	1.563	1.563	43.7	84.9
12	19.00	12.88	12	1.000	17.00	1.750	1.750	71.3	135.9
14	21.00	14.19	12	1.125	18.75	1.875	1.875	93.7	177.7
16	23.50	16.19	16	1.125	21.25	2.000	2.000	120.1	236.8
18	25.00	18.19	16	1.250	22.75	2.125	2.125	127.3	283.7
20	27.50	20.19	20	1.250	25.00	2.375	2.375	167.7	383.2
22	29.50	22.19	20	1.375	27.25	2.500	2.500	189.2	463.1
24	32.00	24.19	20	1.375	29.50	2.625	2.625	234.3	576.1
26	34.25	‡	24	1.375	31.75	2.750	2.750		690.1
28	36.50	‡	28	1.375	34.00	2.750	2.750		782.9
30	38.75	‡	28	1.375	36.00	2.875	2.875		926.8
32	41.75	‡	28	1.625	38.50	3.000	3.000		1114.3
34	43.75	‡	32	1.625	40.50	3.000	3.050		1241.8
36	46.00	‡	32	1.625	42.75	3.125	3.209		1450.7
38	48.75	‡	32	1.625	45.25	3.125	3.394		1731.1
40	50.75	‡	36	1.625	47.25	3.250	3.533		1950.2
42	53.00	‡	36	1.625	49.50	3.375	3.695		2231.5
44	55.25	‡	40	1.625	51.75	3.375	3.857		2529.4
46	57.25	‡	40	1.625	53.75	3.438	3.997		2821.3
48	59.50	‡	44	1.625	56.00	3.500	4.159		3169.0
50	61.75	‡	44	1.875	58.25	3.500	4.327		3522.6
52	64.00	‡	44	1.875	60.50	3.625	4.489		3937.1
54	66.25	‡	44	1.875	62.75	3.750	4.651		4382.5
60	73.00	‡	52	1.875	69.25	3.875	5.116		5858.7
66	80.00	‡	52	1.875	76.00	4.250	5.601		7749.0
72	86.50	‡	60	1.875	82.50	4.375	6.066		9815.3
78	93.00	‡	64	2.125	89.00	4.750			
84	99.75	‡	64	2.125	95.50	4.750			
90	106.50	‡	68	2.438	102.00	5.125			
96	113.25	‡	68	2.438	108.50	5.125			
102	120.00	‡	72	2.688	114.50	5.500			
108	126.75	‡	72	2.688	120.75	5.500			
114	133.50	‡	76	2.938	126.75	5.875			
120	140.25	‡	76	2.938	132.75	5.875			
126	147.00	‡	80	3.188	139.25	6.250			
132	153.75	‡	80	3.188	145.75	6.250			
144	167.25	‡	84	3.438	158.25	6.750			

‡ The purchaser shall specify the ID of the flange for nominal pipe sizes 26 in. and larger. The diameter of the flange bore shall not exceed the pipe OD by more than .25 in.

**Corporate Headquarters**  
CAB Incorporated  
5411 Cole Road, Buford, GA USA 30518  
800-241-7311 678-745-2100 Fax 678-745-2082  
[www.cabinc.com](http://www.cabinc.com) email: [sales@cabinc.com](mailto:sales@cabinc.com)

**Texas Manufacturing Facility**  
CAB Incorporated  
2306 Rayburn Drive, Nacogdoches, TX USA 75961  
800-435-2643 936-569-9430 Fax 936-569-0795