




AWWA C207-07 F-RINGS and BLINDS

300 P.S.I.

Dimensions in Inches

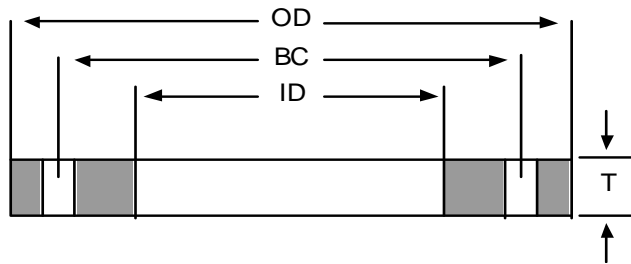

| Nominal size | Outside Diameter (OD) | Slip-on Bore (ID) | No. of Bolt Holes | Diameter Of Holes | Bolt Circle (BC) | Thickness (T) | | Weight Each (lbs) | |
|--------------|-----------------------|-------------------|-------------------|-------------------|------------------|---------------|-------|-------------------|--------|
| | | | | | | Slip-on | Blind | Slip-on | Blind |
| 4 | 10.00 | 4.57 | 8 | 0.875 | 7.88 | 1.13 | 1.130 | 18.4 | 23.6 |
| 5 | 11.00 | 5.66 | 8 | 0.875 | 9.25 | 1.21 | 1.210 | 22.3 | 30.9 |
| 6 | 12.50 | 6.73 | 12 | 0.875 | 10.62 | 1.31 | 1.310 | 29.7 | 42.9 |
| 8 | 15.00 | 8.73 | 12 | 1.000 | 13.00 | 1.31 | 1.310 | 39.9 | 62.1 |
| 10 | 17.50 | 10.88 | 16 | 1.125 | 15.25 | 1.50 | 1.500 | 56.0 | 95.5 |
| 12 | 20.50 | 12.88 | 16 | 1.250 | 17.75 | 1.63 | 1.630 | 83.2 | 143.4 |
| 14 | 23.00 | 14.19 | 20 | 1.250 | 20.25 | 1.94 | 1.940 | 128.0 | 214.9 |
| 16 | 25.50 | 16.19 | 20 | 1.375 | 22.50 | 2.14 | 2.140 | 166.8 | 291.7 |
| 18 | 28.00 | 18.19 | 24 | 1.375 | 24.75 | 2.25 | 2.250 | 204.2 | 369.8 |
| 20 | 30.50 | 20.19 | 24 | 1.375 | 27.00 | 2.33 | 2.330 | 247.4 | 458.8 |
| 22 | 33.00 | 22.19 | 24 | 1.375 | 29.25 | 2.50 | 2.500 | 306.7 | 580.6 |
| 24 | 36.00 | 24.19 | 24 | 1.625 | 32.00 | 2.69 | 2.690 | 387.6 | 737.9 |
| 26 | 38.25 | ‡ | 28 | 1.875 | 34.50 | 3.00 | 3.000 | ‡ | 911.0 |
| 28 | 40.75 | ‡ | 28 | 1.875 | 37.00 | 3.13 | 3.130 | ‡ | 1088.0 |
| 30 | 43.00 | ‡ | 28 | 1.875 | 39.25 | 3.15 | 3.166 | ‡ | 1233.3 |
| 32 | 45.25 | ‡ | 28 | 1.875 | 41.50 | 3.25 | 3.332 | ‡ | 1445.2 |
| 34 | 47.50 | ‡ | 28 | 1.875 | 43.50 | 3.38 | 3.475 | ‡ | 1668.6 |
| 36 | 50.00 | ‡ | 32 | 2.125 | 46.00 | 3.46 | 3.671 | ‡ | 1924.2 |
| 38 | 52.25 | ‡ | 32 | 2.125 | 48.00 | 3.50 | 3.815 | ‡ | 2195.0 |
| 40 | 54.25 | ‡ | 36 | 2.125 | 50.25 | 3.63 | 3.982 | ‡ | 2463.8 |
| 42 | 57.00 | ‡ | 36 | 2.125 | 52.75 | 3.81 | 4.171 | ‡ | 2864.7 |
| 44 | 59.25 | ‡ | 36 | 2.125 | 55.00 | 4.00 | 4.338 | ‡ | 3231.9 |
| 46 | 61.50 | ‡ | 40 | 2.125 | 57.25 | 4.13 | 4.505 | ‡ | 3610.6 |
| 48 | 65.00 | ‡ | 40 | 2.125 | 60.75 | 4.50 | 4.781 | ‡ | 4302.9 |

‡ The purchaser shall specify the ID of the flange for nominal pipe sizes 26 in. and larger. The diameter of the flange bore shall not exceed the pipe OD by more than .25 in.

Corporate Headquarters

CAB Incorporated
 5411 Cole Road, Buford, GA USA 30518
 800-241-7311 678-745-2100 Fax 678-745-2082
www.cabinc.com email: sales@cabinc.com

Texas Manufacturing Facility

CAB Incorporated
 2306 Rayburn Drive, Nacogdoches, TX USA 75961
 800-435-2643 936-569-9430 Fax 936-569-0795